
TESY

# Compact

*Small footprint, big performance*

- The water heaters of the **Compact family** are suitable for installation in small and narrow spaces close to the point of use of hot water. Depending on the room interior and the existing utilities, such appliances can be installed under or above a sink or mixing tap. The Compact family includes electric water heaters with capacities from 10 L to 15 L.

- The flat base of the models for under-the-point-of-use installation allows direct on-floor or in-cupboard placement, which avoids wall drilling.

## Compact 10/15







# Compact 10/15

- **ELEGANT COMPACT DESIGN**
- **SAVES SPACE**
- **CONVENIENT PUSH-PUSH THERMOREGULATOR**
  for smooth water temperature setting
- **BILIGHT INDICATION:**
  - Red light for Heating mode
  - Blue light for Ready-to-use mode
- **ABOVE AND UNDER THE SINK INSTALLATION**
- Range 10 L - 15 L

| MODEL | | COMPACT 10 A | COMPACT 15 A | COMPACT 10 U | COMPACT 15 U |
|---|---|---|---|---|---|
| CODE | | GCA 1015 L52 RC<br>GCA 1020 L52 RC | GCA 1515 L52 RC<br>GCA 1520 L52 RC | GCU 1015 L52 RC | GCU 1515 L52 RC |
| Real Volume | L | 10 | 15 | 10 | 15 |
| Rated power | W | **1500 / 2000** | **1500 / 2000** | 1500 | 1500 |
| Heating time –Δ t 45 K (15 - 60° C) | | 0 h 20 min | 0 h 31 min | 0 h 20 min | 0 h 31 min |
| Annual consumption of electricity AEC | kWh | 525 | 534 | 573 | 571 |
| Energy class | | A | B | B | B |
| Load profile | | XXS | XXS | XXS | XXS |
| *T out of box | °C | 60 | 60 | 60 | 60 |
| **V 40 | L | 16 | 25 | 15 | 22 |
| ***T max | °C | 70 | 70 | 70 | 70 |
| ****Max 40 | L | 18 | 27 | 16 | 27 |

*T out of box – the optimal working temperature for the certain electric water heater model, set by the producer
**V 40 – the quantity of hot water, which the electric water heater can produce, while working at T out of box
***T max – the maximal working temperature of the electric water heater
****Max 40 – the maximal quantity of hot water, which the electric water heater can produce, while working at maximum temperature

# Compact 10/15

BILIGHT FUNCTION

CRYSTALTECH


PUSH-PUSH ROTATING KNOB


COMPACT SIZE

EASY INSTALLATION

ABOVE SINK INSTALLATION

UNDER SINK INSTALLATION

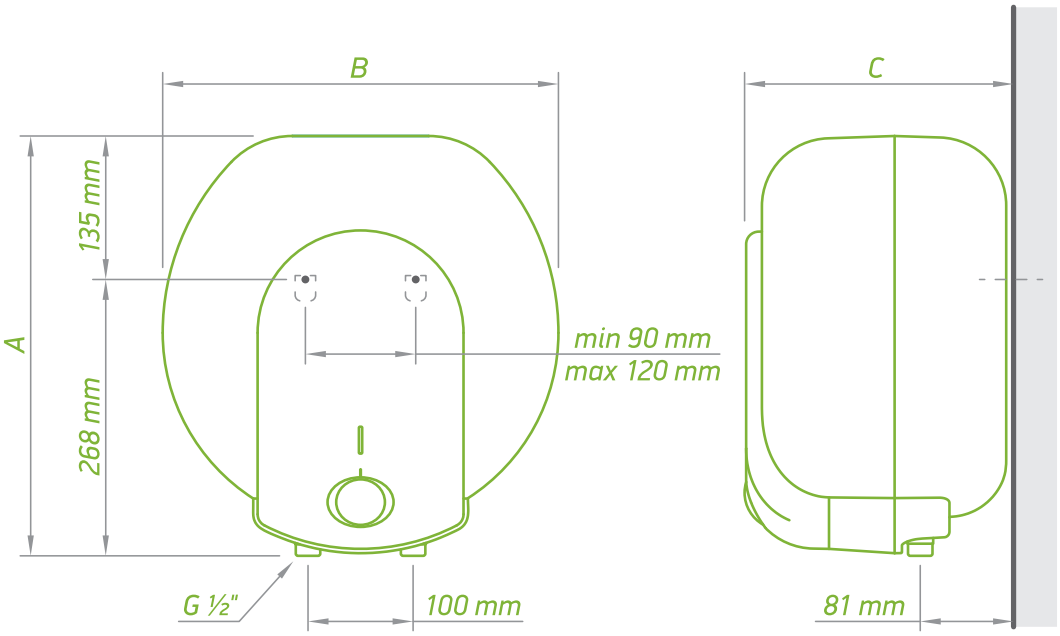

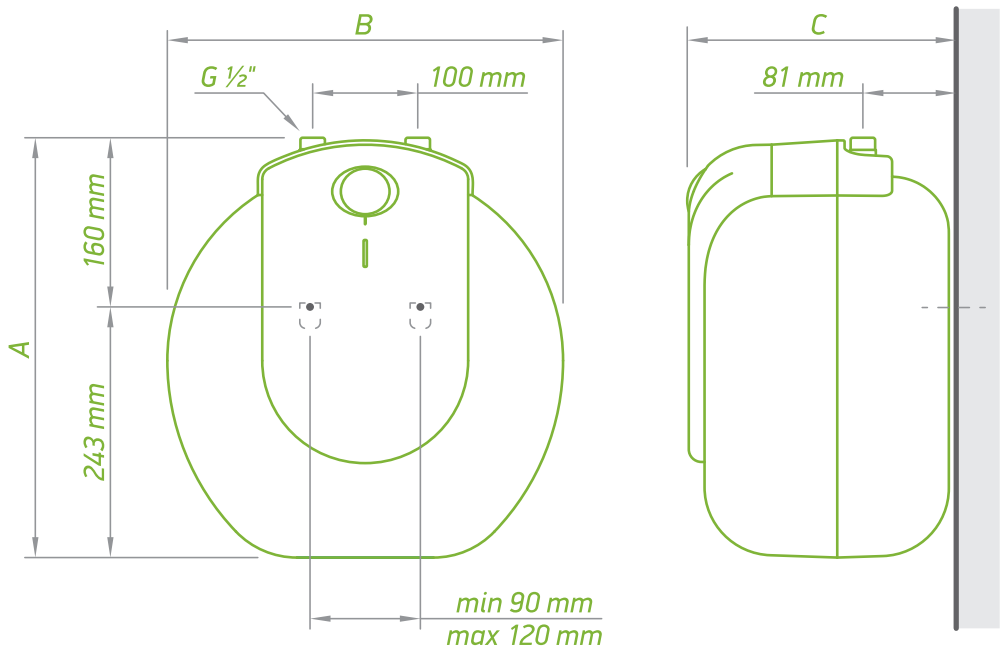
| PRODUCT DIMENSIONS | | COMPACT 10 A | COMPACT 15 A | COMPACT 10 U | COMPACT 15 U |
|---|---|---|---|---|---|
| CODE | | GCU 1015 L52 RC | GCU 1515 L52 RC | GCU 1015 L52 RC | GCU 1515 L52 RC |
| height (A) | mm | 399 | 399 | 399 | 399 |
| width (B) | mm | 377 | 377 | 377 | 377 |
| depth (C) | mm | 247 | 304 | 247 | 304 |